



HASO SWIR

Wavefront sensor
The InGaAs

High accuracy
SWIR range
Alignment-free



ONI compatible



imagine
optic

HASO SWIR +

A great choice for short wavelength infrared applications, ideal for industry and laboratories.

This generation features the new SpotTracker™ technology. It provides absolute wavefront and tilt information, eliminating alignment requirements for faster and easier implementation.



Compatible with the **Optical Engineer Companion** modular system: easily combine the accessories you need.



APPLICATIONS

Successfully used in the most demanding applications in optical metrology, microscopy, and laser diagnostics, the HASO SWIR performs multiple functions:

- + Quantify aberrations in optical systems for LIDAR, free-space communication, space and defense, etc.
- + Align the system to ensure that it performs at its best
- + Predict the performance of optical systems in terms of focusing capability (PSF) or imaging quality (MTF)
- + Verify that the optics comply with specifications
- + Directly measure the optical system's wavelength dependency
- + Drive a wavefront corrector to correct for system aberrations
- + Check whether the optical mount overly distorts the optics
- + Diagnostic of ultra-short-pulses with the Gated version

FEATURES

- + Laser beam deviation control better than 3 µrad RMS
- + Collimation diagnostic up to curvature radii over 300m
- + Live wavefront acquisition. Measurement accuracy $\lambda/100$ RMS guaranteed for beams down to F/5
- + True tilt measurement, curvature, astigmatism and high-order aberrations quantification
- + Optionnal Gated version with ultra-short exposure time feature to synchronize with a pulsed laser.

SPECIFICATIONS*

OPERATING SPECS


Aperture dimension	9.30 x 7.44 mm ²
Number of microlenses	40 x 32
Maximum acquisition frequency	150 Hz (USB 3.0) or 49 Hz (GigE)
Calibrated wavelength range	0.9 - 1.7 µm
Minimum power	0.3 pW
External trigger	TTL signal
Operating system	Windows 10

OPTICAL SPECS

Repeatability	$\lambda/200$ RMS
Absolute wavefront measurement accuracy	$\lambda/100$ RMS
Spatial sampling	~ 232.5 µm
Tilt dynamic range	$> \pm 3^\circ$
Focus dynamic range	± 0.017 m to $\pm \infty$


MISC

Dimensions (Height x Width x Length)	75 x 78 x 63 mm ³
Weight for USB version	250 g
Working temperature	15 - 30 °C
Interface	USB 3.0 or GigE
Power consumption	< 5 W
Exposure time of Gated version	100 ns - 9 µs

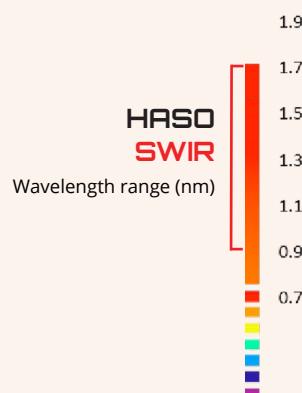


HASO SWIR

Dynamic range at $\lambda = 1550$ nm

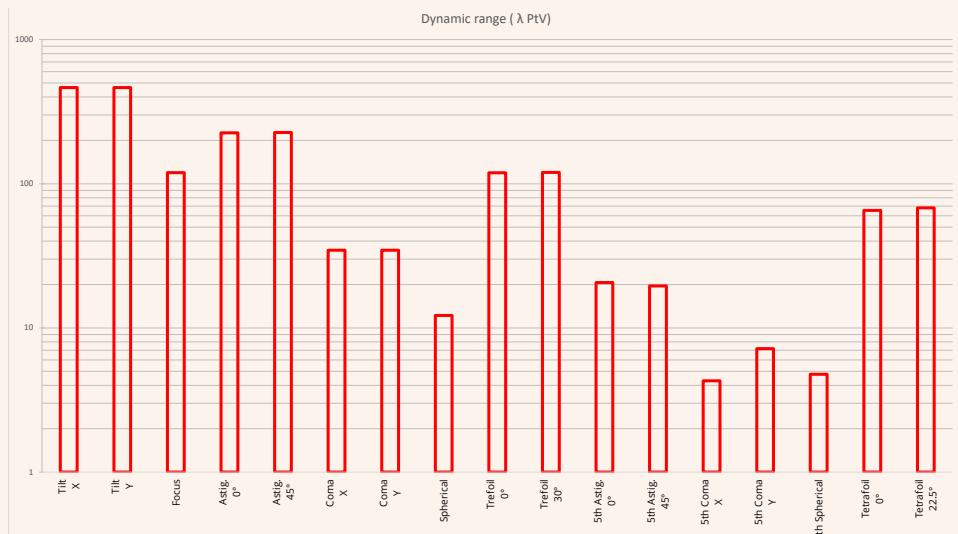


*Subject to changes without further notice

DIMENSIONS** (mm)

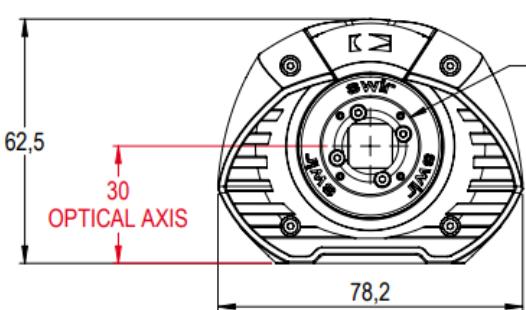

PINHOLE STORAGE

C-Mount Thread

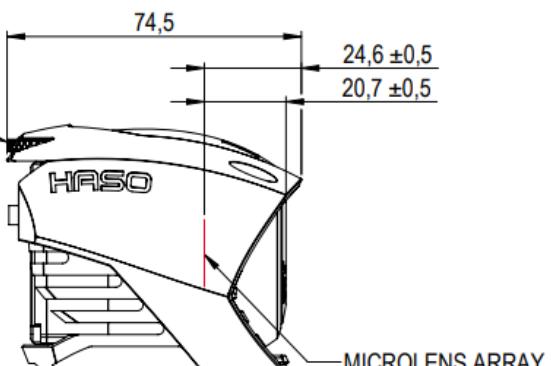

**USB 3.0 model

SOFTWARE

WAVEVIEW™


Metrology Software

WAVEVIEW™ is the most advanced wavefront measurement and analysis software.

It offers more than 150 features and tools optimized for a wide range of highly demanding applications.

Options :

- + Extensions for PSF, MTF and Strehl ratio
- + Optional SDK in C/C++, LabVIEW and Python

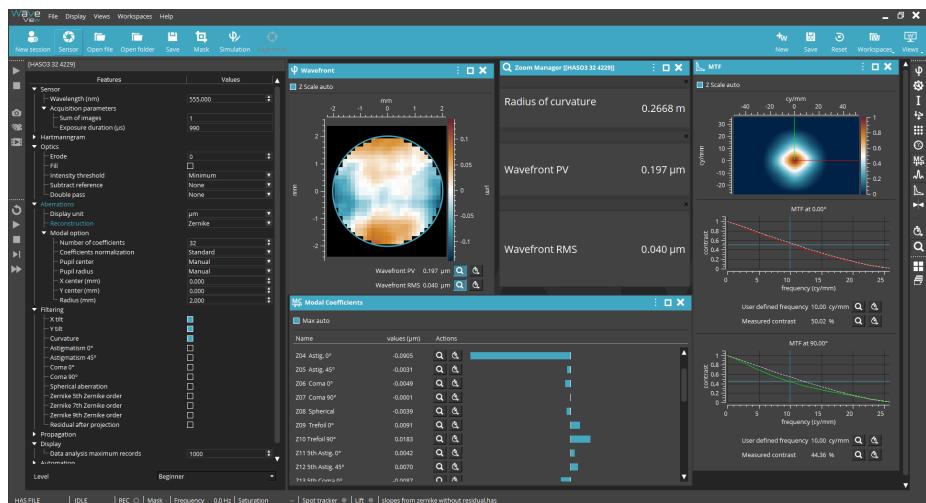

WAVETUNE™


Adaptive Optics Software

WAVETUNE™ is a unique software that seamlessly combines wavefront measurement and correction features with extensive instrument diagnostics.

It is perfectly adapted to our HASO wavefront sensors, ILAO STAR, MIRAO and mu-DM deformable mirrors, as well as to a wide range of active components.

Options :

- + Optional SDK in C/C++, LabVIEW and Python

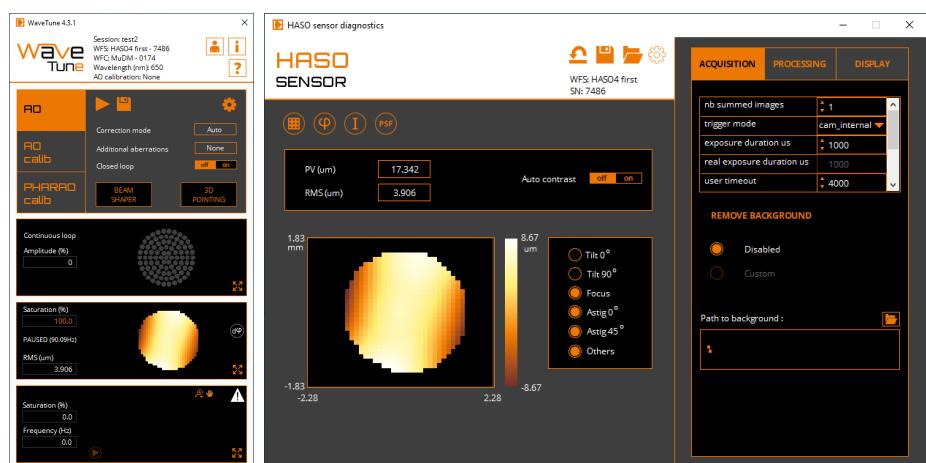

CONTACT US

Imagine Optic Headquarters

18, rue Charles de Gaulle

91400 ORSAY · France

Phone +33 (0)1 64 86 15 60

sales@imagine-optic.com

www.imagine-optic.com

