



# HAS04

## BROADBAND

Wavefront sensor  
**The Workhorse**

From UV to IR  
Versatile  
Alignment-free

 compatible



# HASO4 BROADBAND +

**A great choice  
for almost any lab  
or industrial application,  
the HASO4 BROADBAND  
is Imagine Optic's  
most versatile  
wavefront sensor.**

This generation  
features the new  
SpotTracker™ technology.  
It provides absolute  
wavefront and tilt  
information, eliminating  
alignment requirements  
for faster and easier  
implementation.



Compatible with the  
**Optical Engineer  
Companion** modular  
system: easily combine  
the accessories you  
need.

## APPLICATIONS

Successfully used in the most demanding applications in optical metrology, microscopy, and laser diagnostics, the HASO4 BROADBAND performs multiple functions :

- + Quantify the aberrations of an optical system
- + Align the system to ensure that it performs at its best
- + Predict the performance of optical systems in terms of focusing capability or imaging quality
- + Quantify the effects of temperature and gravity on system performance
- + Verify that the optics comply with specifications
- + Measure directly the optical system's wavelength dependency
- + Drive a wavefront corrector to rectify system aberrations
- + Check whether the optical mount overly distorts the optics

## FEATURES

- + Easy wavefront measurement on the whole spectrum of the sensor: 350 - 1100 nm with no wavelength dependency
- + Direct wavefront acquisition of converging and diverging F/5 beams with an accuracy of about  $\lambda/100$  RMS, including astigmatism and high-order aberrations
- + Beam collimation with an accuracy better than 300 m radius of curvature
- + Gaussian beam measurement down to  $1/e^4$  (contrast of 100)



SPECIFICATIONS\*

OPERATING SPECS

Aperture dimension	6,9 x 5,1 mm²
Number of microlenses	68 x 50
Maximum acquisition frequency	58 Hz (USB 3.0) or 30 Hz (GigE)
Calibrated wavelength range	350 - 1100 nm
Minimum power	0,15 nW
External trigger	TTL signal

OPERATING SYSTEM


Windows 10

OPTICAL SPECS


Repeatability	< λ/200 RMS
Absolute wavefront measurement accuracy	≤ 6 nm RMS
• λ between 350-600 nm	~ λ/100 RMS
• λ between 600-1100 nm	~ 100 μm
Spatial sampling	> ± 3°
Tilt dynamic range	± 0.008 m to ± ∞
Focus dynamic range	

MISC

Dimensions (Height x Width x Length)	42 x 47 x 60 mm³ (USB 3.0)
Weight	200 g
Working temperature	15 - 30 °C
Interface	USB 3.0 or GigE
Power consumption	3,1 W


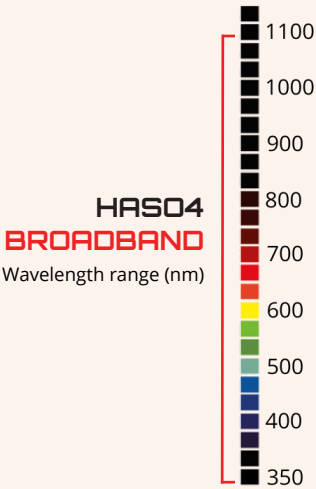


HASO4 BROADBAND  
Dynamic range at λ = 635 nm

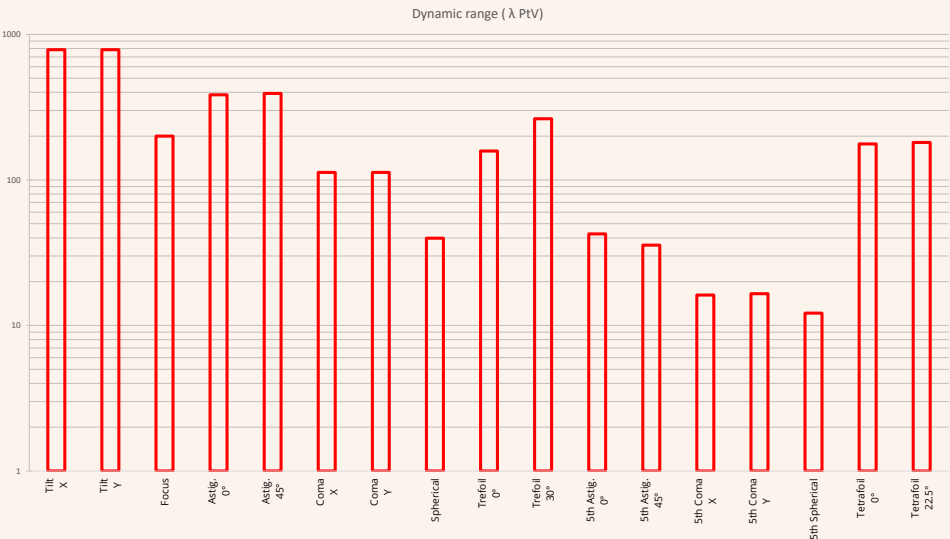

\*Subject to changes without further notice

DIMENSIONS\*\* (mm)

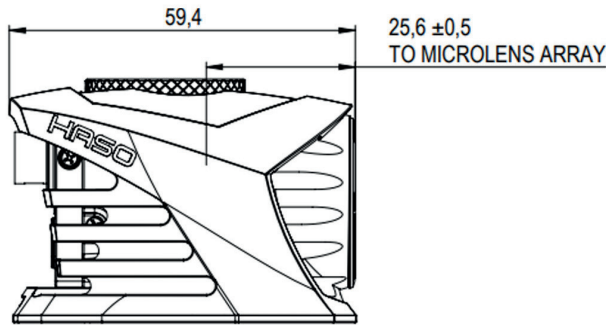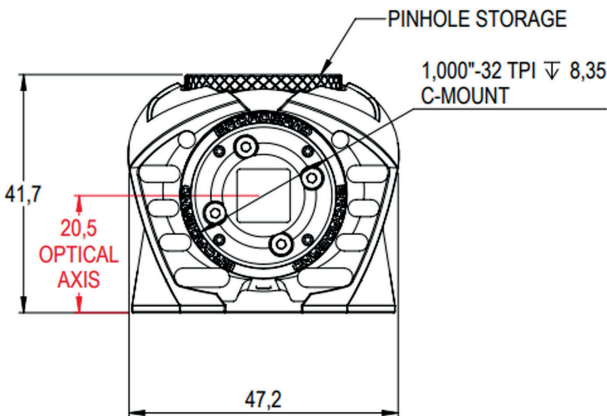

\*\*USB 3.0 model

## SOFTWARE


### WAVEVIEW™ Metrology Software

WAVEVIEW™ is the most advanced wavefront measurement and analysis software.

It offers more than 150 features and tools optimized for a wide range of highly demanding applications.

#### Options :

- + Extensions for PSF, MTF and Strehl ratio
- + Optional SDK in C/C++, LabVIEW and Python

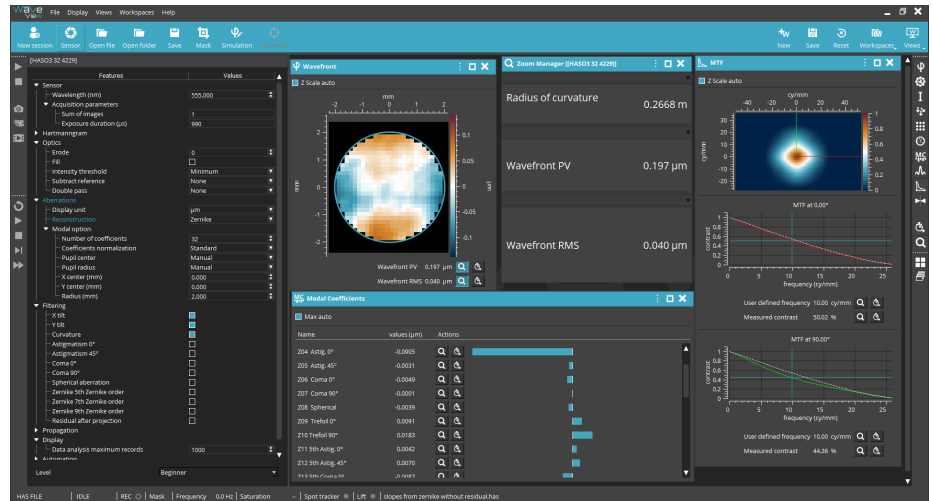


### WAVETUNE™ Adaptive Optics Software

WAVETUNE™ is a unique software that seamlessly combines wavefront measurement and correction features with extensive instrument diagnostics.

It is perfectly adapted to our HASO wavefront sensors, ILAO STAR, MIRAO and mu-DM deformable mirrors, as well as to a wide range of active components.

#### Options :

- + Optional SDK in C/C++, LabVIEW and Python

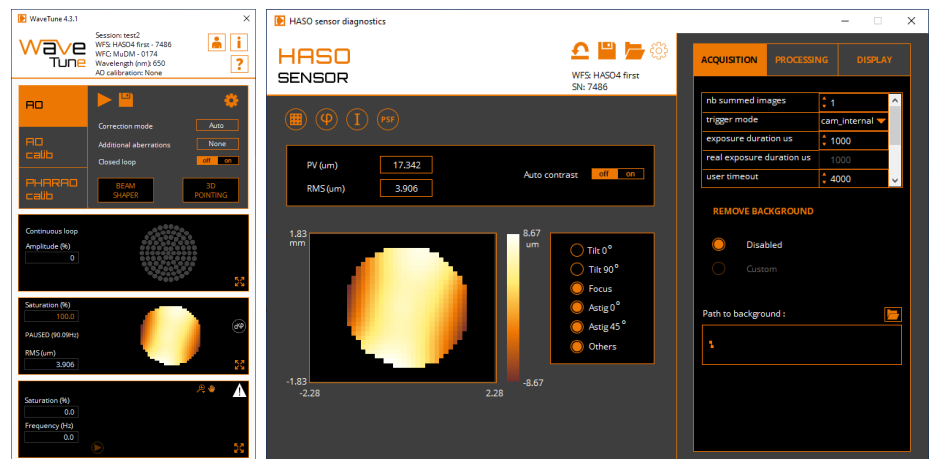

## CONTACT US

**Imagine Optic Headquarters**  
18, rue Charles de Gaulle  
91400 ORSAY · France  
Phone +33 (0)1 64 86 15 60  
sales@imagine-optic.com  
www.imagine-optic.com

