



# HAS04

## FIRST

### Wavefront sensor The Chameleon

On demand wavelength  
High accuracy  
Best cost performance ratio



 compatible



# HASO4 FIRST +

**The HASO4 Shack-Hartmann Wavefront Sensor optimized for one wavelength, the one you really need.**

The HASO4 FIRST is now faster and has an improved spatial resolution while keeping the same accuracy and optimized price point.



Compatible with the **Optical Engineer Companion** modular system: easily combine the accessories you need.

## APPLICATIONS

Successfully used in the most demanding applications in optical metrology, microscopy, and laser diagnostics, the HASO4 FIRST performs multiple functions :

- + Quantify the aberrations of an optical system
- + Align optical systems to ensure that it works optimally
- + Predict the performance of optical systems in terms of focusing capability or imaging quality
- + Quantify the effects of temperature and gravity on system performance
- + Verify that the optics comply with specifications
- + Drive a wavefront corrector to correct for system aberrations
- + Check whether the optical mount overly distorts the optics

## FEATURES

- + Beam collimation with an accuracy better than 200 m radius of curvature
- + A 20 mm focal length measurement with a sensitivity of 1  $\mu\text{m}$  RMS
- + Direct wavefront acquisition of converging and diverging F/5 beams with an accuracy of  $\lambda/100$  RMS including astigmatism and high-order aberrations
- + Control and adjustment of axial laser beam deviation better than 5  $\mu\text{rad}$  RMS
- +  $\pm 50$  nm calibration bandwidth or extended wavelength range optional:  $\pm 150\text{nm}$  around the calibration wavelength



# SPECIFICATIONS\*

## OPERATING SPECS

|                                     |                                  |
|-------------------------------------|----------------------------------|
| Aperture dimension                  | 4.5 x 3.7 mm <sup>2</sup>        |
| Number of microlenses               | 44 x 36                          |
| Maximum acquisition frequency       | 125 Hz (USB 3.0) or 30 Hz (GigE) |
| One wavelength ± 50 nm in the range | 350 - 1100 nm                    |
| Minimum power                       | 0.15 nW                          |
| External trigger TTL signal         | TTL signal                       |

## OPERATING SYSTEM


Windows 10

## OPTICAL SPECS


|   |                               |
|---|-------------------------------|
| Repeatability                           | < $\lambda/200$ RMS           |
| Absolute wavefront measurement accuracy | ~ $\lambda/100$ RMS           |
| Spatial sampling                        | ~ 100 $\mu$ m                 |
| Tilt dynamics range                     | > $\pm 3^\circ$               |
| Focus dynamics range                    | $\pm 0.008$ m to $\pm \infty$ |

## MISC

|                                      |  |
|--------------------------------------|--|
| Dimensions (Height x Width x Length) | 42 x 47 x 60 mm <sup>3</sup> (USB 3.0) |
| Weight for USB version               | 200 g                                  |
| Working temperature                  | 15 - 30 °C                             |
| Interface                            | USB 3.0 or GigE                        |
| Power consumption                    | 3.1 W                                  |


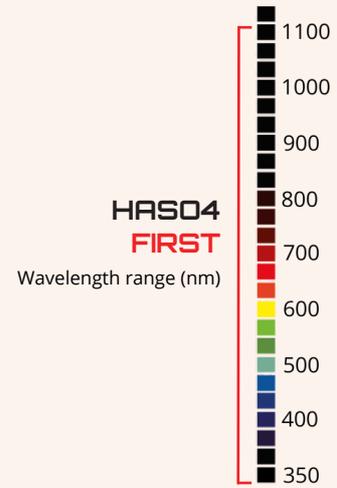


**HASO4 FIRST**  
Dynamic range at  $\lambda = 635$  nm

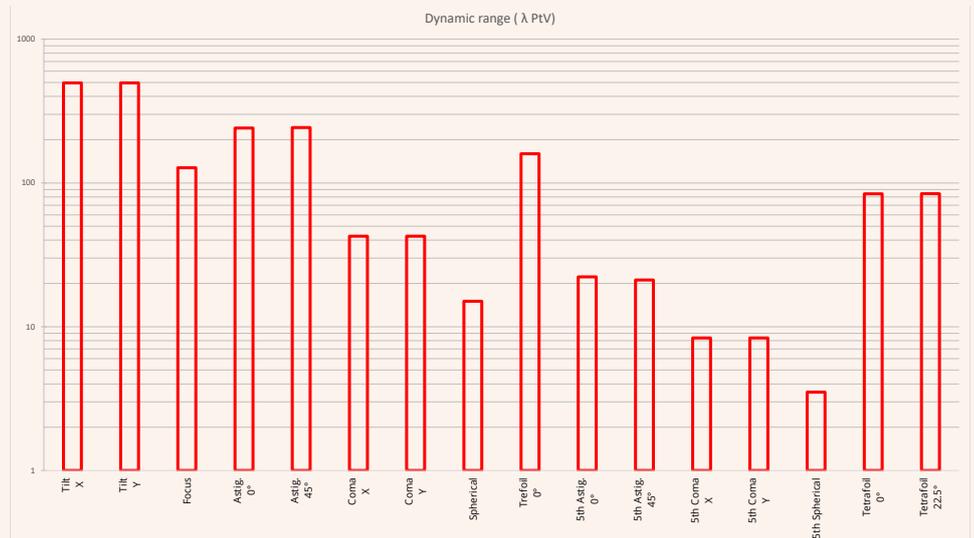

\*Subject to changes without further notice

# DIMENSIONS\*\* (mm)

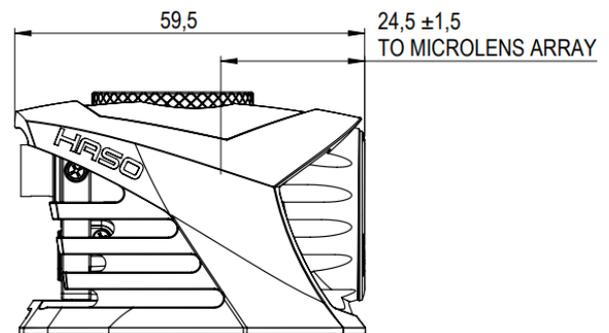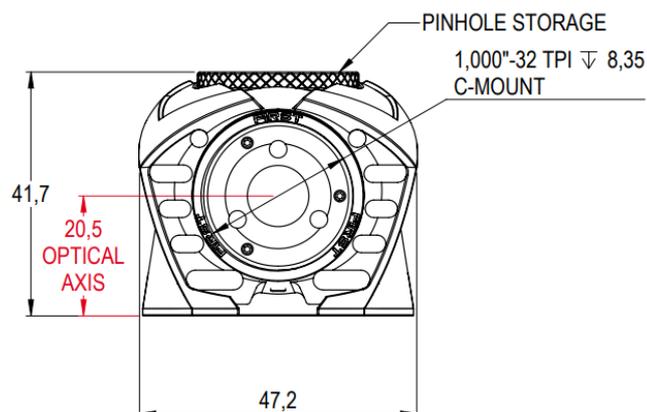

\*\* USB 3.0 model

# SOFTWARE


## WAVEVIEW™ Metrology Software

WAVEVIEW™ is the most advanced wavefront measurement and analysis software.

It offers more than 150 features and tools optimized for a wide range of highly demanding applications.

### Options :

- + Extensions for PSF, MTF and Strehl ratio
- + Optional SDK in C/C++, LabVIEW and Python

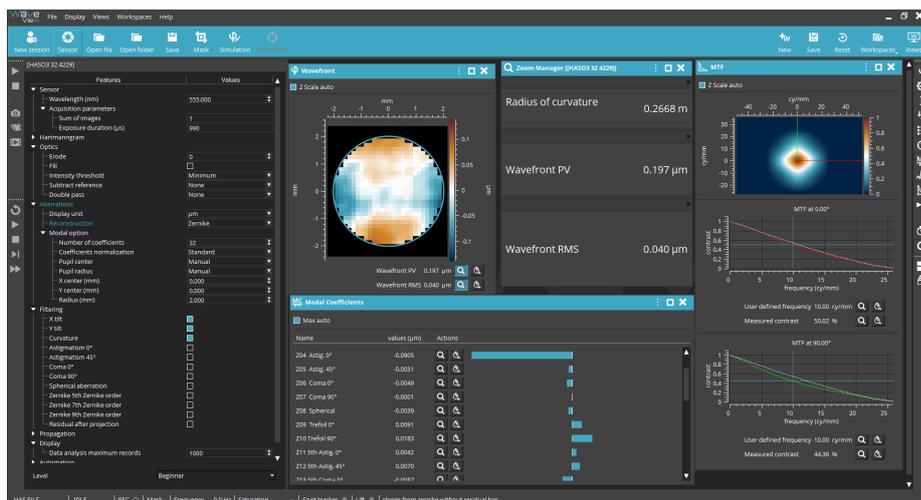


## WAVETUNE™ Adaptive Optics Software

WAVETUNE™ is a unique software that seamlessly combines wavefront measurement and correction features with extensive instrument diagnostics.

It is perfectly adapted to our HASO wavefront sensors, ILAO STAR, MIRAO and mu-DM deformable mirrors, as well as to a wide range of active components.

### Options :

- + Optional SDK in C/C++, LabVIEW and Python

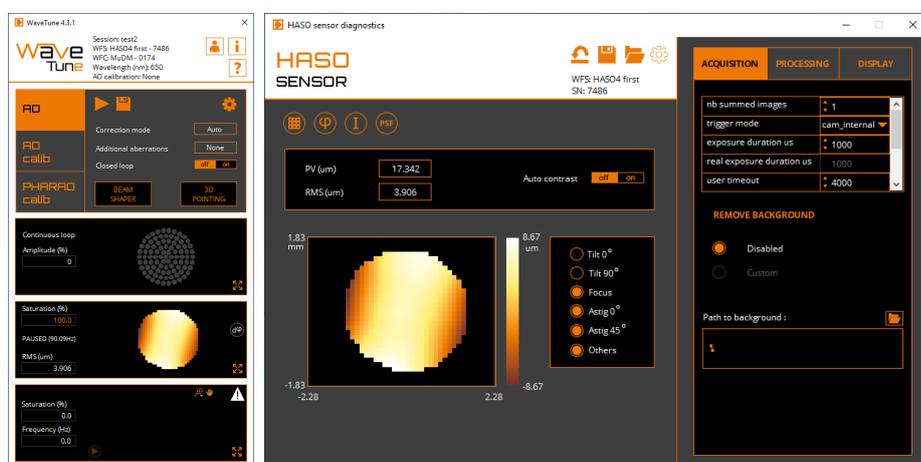

## CONTACT US

**Imagine Optic Headquarters**  
18, rue Charles de Gaulle  
91400 ORSAY · France  
Phone +33 (0)1 64 86 15 60  
sales@imagine-optic.com  
www.imagine-optic.com

